


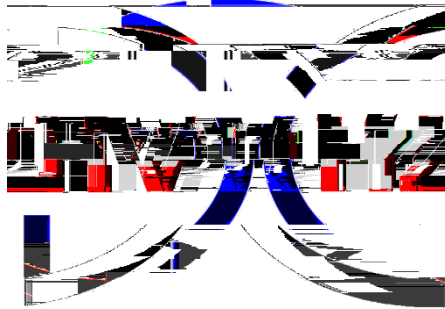

6. PC PC USB RS232

7.

DL/T846.8-2004

1		0.5A	1.0A	1.0A	
2	10KHZ				
3		268			
4		1.0A	0.1-20Ω	0.5A	0.1-40Ω : 0.1-200Ω
5		0.1-200Ω ,	0.01Ω ,	0.1-1Ω	
	0.1Ω ; 1A	1Ω -20Ω (	1Ω)	1.0% ± 2	; 0.5A 1Ω -40
	Ω (	1Ω)	2.0% ± 2		
6	:	0.1ms^268ms	0.1ms	0.1ms-100ms	
	1ms ;	100ms-268ms (	100ms)	1%	
7	320*240				
8	32	100			
9	12 6	A/D	250KHZ		
10	220V ± 10%	200W			
11	415 × 320 × 168mm				
12	6kg				